



SPECIAL FEATURES


- Metal Case
- LCD Protection Glass
- Multi Source Connectivity (Analog & Digital)
- 3D Comb Filter / Deinterlace
- 0.270 x 0.270mm Pixel Pitch
- Built in Speaker
- 1920 x 1200 @ 60Hz Maximum Resolution
- PIP / PBP Multi Display Function
- Wall, Ceiling Mount

SPECIFICATIONS

		24RTC
Display	Screen Size	24 Inch (Full HD)
	Max. Resolution	1920 x 1200 @ 60Hz
	Pixel Pitch	0.270 x 0.270mm
	Brightness	400cd/m ²
	Contrast Ratio	1000 : 1
	Aspect Ratio	16 : 10
	Viewing Angle (H/V)	178° / 178°
	Display Color	16.7 Million
	Response Time	< 16ms
	Video System	NTSC / PAL
	Interface	Frequency (H)
Frequency (V)		56~75 KHz(V)
Video In / Out (BNC Type)		2 / 2
S-Video In / Out		1 / 1
VGA In (15Pin D-Sub)		1
Component		1
DVI-D In / HDMI In		1 / 1
Audio In / Out (RCA Type)		2 / 2
PC Stereo In		1
Transmitter	Remote Control	Yes
Audio	Built-in Speakers	Yes (2W x 2)
	Filter Type	3D Comb Filter / Deinterlace
Features	LCD Protection Glass	Yes
	Multi Display Function	PIP / PBP
	Multi Language	English, Spanish, French, German, Italian, Portuguese, Dutch
Dimension	Outline Dimension	22.5" x 15.1" x 3.70"
	Net. Weight (with stand)	9Kg (19.8lbs)
Cabinet	Color	Black
	Base Stand	Folding Leg
Warranty	Part/Labor	1year / 1year
	MTBF (Approx.)	50,000 Hours
Regulations		TUV - NRTL (=UL), CB, FCC (A), CE-Emc (LVD)
Power	Consumption: < On	< 110W
	Electrical Ratings	AC100 ~ 240V(50/60Hz)
Circumstance	Operating Temperature	10 ~ 40°C / 50 ~ 104°F
	VESA Mount Size	100 x 100mm (BS M4 x 10mm Screw)
Mounts	Wall	WB-05, WB-10, WB-30, WB-31
	Ceiling	CMK-01

*Design and Specs are subject to change without any notice

DIMENSIONS

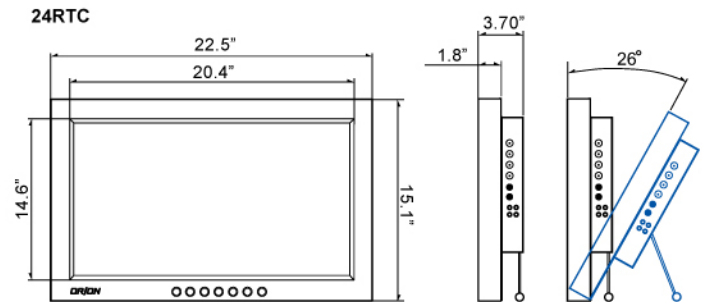

MOUNT OPTION

